



# HMI Solution & Graphic Products



**AIP 9"**

**Hardware manual**

<b>CHAPTER 1: VERSION'S HISTORICAL BACKGROUND</b>	<b>3</b>
<b>CHAPTER 2: GENERAL DESCRIPTION</b>	<b>4</b>
<b>CHAPTER 3: LIST OF ENVIRONMENTAL REQUIREMENTS</b>	<b>5</b>
ENVIRONMENTAL NORMS AND EMC	5
<b>CHAPTER 4: SPECIFICATION OF THE PROGRAMMABLE INTELLIGENT DISPLAY</b>	<b>6</b>
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS	6
HMI CHARACTERISTICS	6
IO SPECIFICATION	6
ELECTRICAL CHARACTERISTICS	7
<b>CHAPTER 5: PIN OUT</b>	<b>8</b>
<b>CHAPTER 6: DESCRIPTION OF CONNECTIONS</b>	<b>10</b>
CONNECTOR USB	10
CONNECTOR V1 & V2	10
CONNECTOR FROM J1 TO J7	10
<b>CHAPTER 7: EMBEDDED MAIN BOARD - <i>MASTER MODE MODEL</i></b>	<b>10</b>
MECHANICAL CONSTRAINTS	11
ELECTRICAL CHARACTERISTICS	12
<b>CHAPTER 8: MECHANICAL DESCRIPTION</b>	<b>13</b>
<b>CHAPTER 9: MOUNTING RECOMMENDATION</b>	<b>15</b>
<b>CHAPTER 10: CLAIRITEC'S CONTACT</b>	<b>17</b>
CLAIRITEC	17

**CHAPTER 1: VERSION'S HISTORICAL BACKGROUND**

Reference	Modifications	Date
<a href="#">DOC-20160313-1A-UK</a>	Creation	13/03/2017
<a href="#">DOC-20160313-1B-UK</a>	Colors number and casings modification	10/10/2018

## CHAPTER 2: GENERAL DESCRIPTION

The Programmable Intelligent Display is a "Plug & Play" graphic display module which integrates specific inputs and outputs. This product is developed & produced in France.

It consists of a TFT-LCD 7" WVGA (800 x 480 pixels) touchscreen display driven by an integrated HMI board from CLAIRITEC and an I/O management board. All these components are enclosed in an IP65 case. The Programmable Intelligent Display is EMC compliant and withstands a temperature range from -20°C to +70°C. It can easily fit into electronic equipment thanks to its modular case.


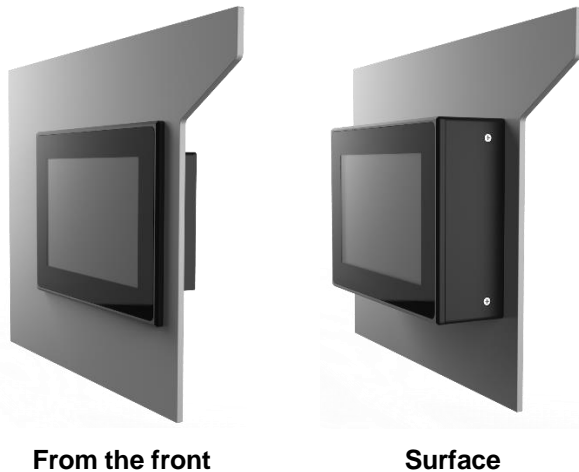


Figure 1 – Case's Topology

The easy to use product range embeds lots of different versions to be modular for your own system. It can be used in 2 different modes: slave and master mode:

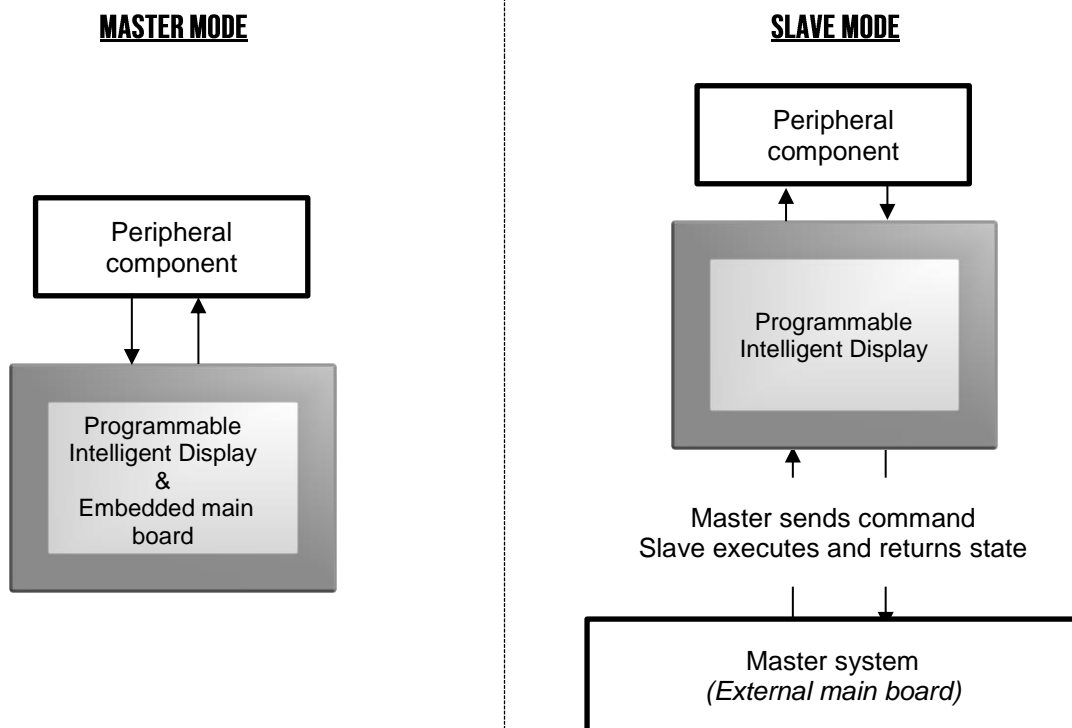

**CHAPTER 3: LIST OF ENVIRONMENTAL REQUIREMENTS****ENVIRONMENTAL NORMS AND EMC**

The following table lists the environmental and EMC requirements that the GraphLight meets.

<b>Norm</b>	<b>Minimum required</b>
<b>Environmental</b>	
<b>RoHS</b>	All the components used in AIP respect the RoHS norm
<b>Electromagnetic compatibility (electronic board alone)</b>	
<b>NF EN-61000-4-3</b>	Susceptibility 30 MHz - 1 GHz, 25Watt 10V/m
<b>NF EN-55022</b>	Conducted emission 150Khz – 30 MHz class B Radiated emission 30Mhz – 1Ghz class B
<b>NF-EN-61000-4-2</b>	Immunity against 8kV electrostatic discharge in the air, 4kV when contact
<b>UL 94 V-0</b>	E76251 PCB agreement
<b>Mechanical</b>	
<b>IP65</b>	Protection with the "from the front" case is waterproof
<b>IP40</b>	All the components are protected by this norm
<b>Vesa 75x75</b>	The "surface" and "hand" cases are compatible with the VESA 75x75 system



**WARNING:** Any handling on the electronic board involves the risk of electrostatic discharge (ESD), which could destroy components.

We strongly advise you to wear an antistatic wrist strap connected to Earth. Similarly, the electronic boards must be transported inside a specific antistatic packaging

**CHAPTER 4: SPECIFICATION OF THE PROGRAMMABLE INTELLIGENT DISPLAY****MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS**

Item	Specifications
Size	9" Diagonal
Resolution	800 x RGB x 480 dots (WVGA)
Viewing direction	6 o'clock
Viewing area	198.0 (W) x 111.7 (H) mm
Horizontal / Vertical flip	Available
Backlight	White LED
Brightness	400 cd/m <sup>2</sup>
Viewing angle (typ.)	120° Vertical / 140° Horizontal
Touch screen	4-wire resistive / 1 million touch times by finger Capacitive / Minimum of 50 million touch times by finger
Operating temperature	-20°C ~ +70°C
Storage temperature	-30°C ~ +80°C
EMC compliant	NF-EN55022 class B (Frequency range 150 kHz to 2 GHz) NF-EN61000-4-2 (8 kV contact discharge / 15 kV air discharge) NF-EN61000-4-3 (Frequency range : 30 MHz to 1 GHz – 10 V/m)
IP Certification	IP65 on front face with recessed case IP40 in others faces

**HMI CHARACTERISTICS**

Item	Specifications
Color LCD Management	262k colors (display) – 16M (controller) TFT transmissive active matrix
Touchscreen Management	Advanced clicking area processing
Graphic Engine	Advanced display algorithms
Graphic layer Management	Two layer dynamically managed
Storage Memory	32 Mb
Graphical Layout Management	GraphConverter <sup>®</sup> 3 software tool enables you to build your HMI's graphic library and upload it to the board flash memory

**IO SPECIFICATION**




	Digital	Analogic	Relay	Thermocouple	PT100	PWM	Add
Input	6	5	-	2	1	-	8
Output	6	2	6	-	-	2	

**ELECTRICAL CHARACTERISTICS**

	Item	Symbol	Min	Typ	Max	Unit
<b>Power</b>	Power Supply voltage	$V_{cc}$	12	-	36	V
	Power Supply consumption*	$I_{cc}$	260	-	TBC	mA
	Max Intensity	$I_{sat}$	-	-	2	A
<b>RS232</b>	speed transmission	Bds	9,6	-	355	Kbds
<b>RS485</b>	speed transmission	Bds	9,6	-	355	Kbds
<b>CAN</b>	CAN 2.0B	Bds	100	-	500	Kbds
<b>USB</b>	voltage reference	$V_{USB}$	2.7	5	5.5	V
	Continuous output current	$I_{USB}$	0	-	500	mA
<b>PWM</b>	PWM voltage high level	$V_{PWM\ OH}$	-	$V_{cc}$	-	V
	PWM voltage low level	$V_{PWM\ LH}$	-	0	-	V
	PWM intensity	$V_{PWM\ I}$	0	-	100	mA
	Frequency	$V_{PWM\ F}$	10	-	500k	Hz
	Duty cycle	$V_{PWM\ Dt}$	0	-	100	%
<b>Thermcouple</b>	Temperature range	$T^{\circ}_{MIN\ MAX}$	TBM	-	TBM	$^{\circ}C$
<b>PT100</b>	Temperature range	$T^{\circ}_{MIN\ MAX}$	TBM	-	TBM	$^{\circ}C$
<b>Analog Input</b>	Voltage	$V_{in\ MAX}$	0	-	10	V
	Resolution	R	-	10	-	bit
<b>Analog Output</b>	Voltage	$V_{out\ MAX}$	0	-	10	V
	Frequence	f	0	-	3	kHz
	Intensity	$I_{out}$	0	-	20	mA
	Resolution	R	-	8	-	bit
<b>Relay NO</b>	Intensity	$I_{in}$	0	-	2	A
	Voltage	$V_{in}$	0	-	220	Vdc
<b>Relay NO/NC</b>	Intensity	$I_{in}$	0	-	2	A
	Voltage	$V_{in}$	0	-	220	Vdc
<b>Digital Output</b>	Voltage Com	COM	5.5	-	40	V
	Voltage Out	$V_{out}$	0	-	COM	V
	Intensity per channel	$I_{max}$	0	-	2	A
<b>Digital Input</b>	Voltage Digital Input	$V_{in}$	0	-	$V_{cc}$	V

\*Without peripherals

**CHAPTER 5: PIN OUT**

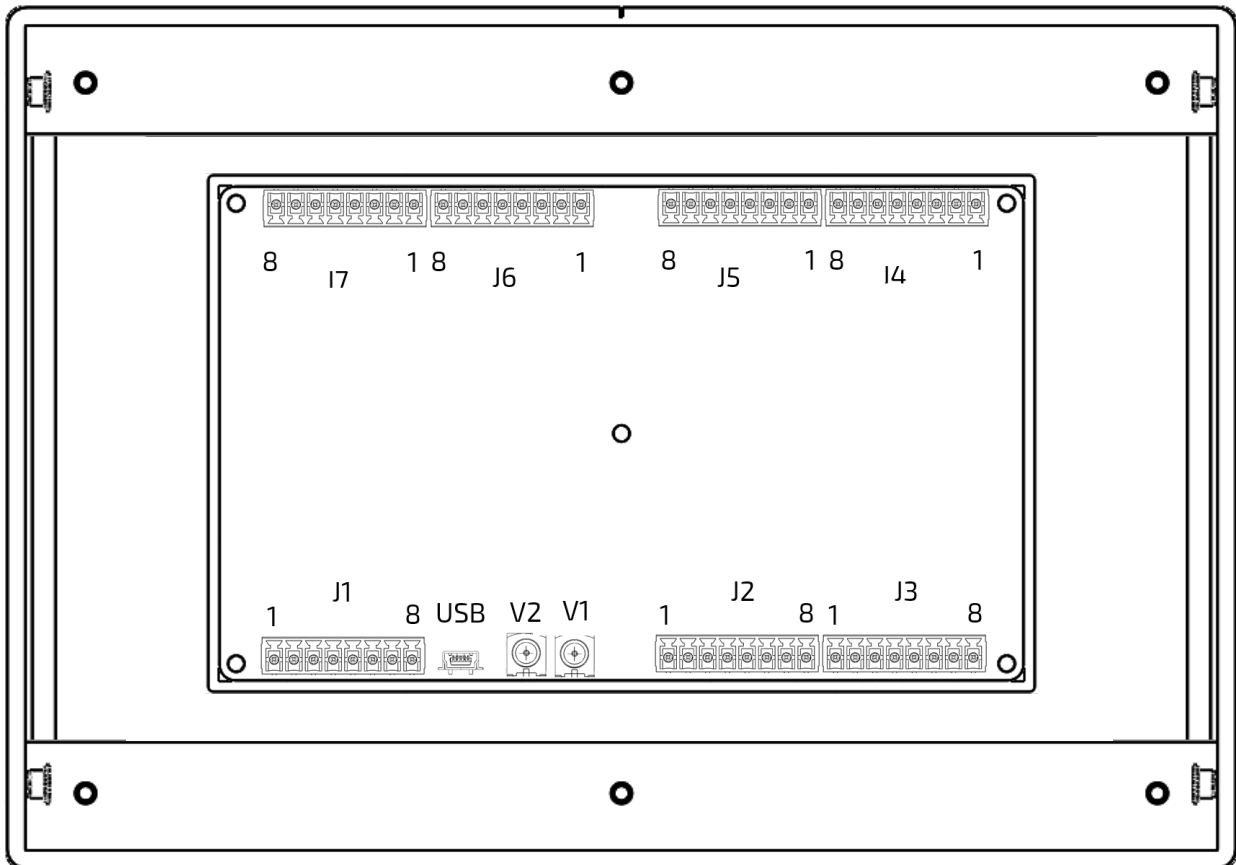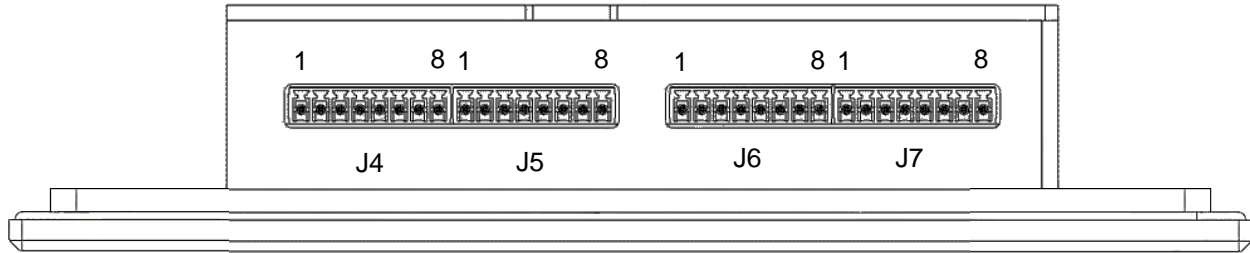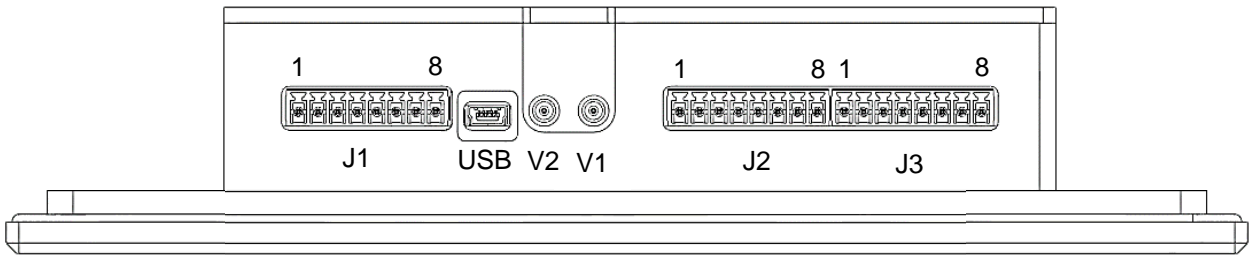




J1	1	Power Supply	POWER
	2	GND	
	3	CAN L	COMMUNICATIONS
	4	CAN H	
	5	RS485 A	
	6	RS485 B   RS232 TX	
	7	RS485 Z   RS232 RX	
	8	RS485 Y	
J2	1	Output PWM 2	PWM OUTPUTS
	2	Output PWM 1	
	3	Thermocouple 2 +	THERMAL INPUTS
	4	Thermocouple 2 -	
	5	Thermocouple 1 +	
	6	Thermocouple 1 -	
	7	PT100	
	8	GND	
J3	1	Analog Input 5	ANALOG INPUTS
	2	Analog Input 4	
	3	Analog Input 3	
	4	Analog Input 2	
	5	Analog Input 1	
	6	GND	POWER
	7	Analog Output 1	ANALOG OUTPUTS
	8	Analog Output 2	
J4	1	GND	POWER
	2	Digital Input 6	DIGITAL INPUTS
	3	Digital Input 5	
	4	Digital Input 4	
	5	Digital Input 3	
	6	Digital Input 2	
	7	Digital Input 1	
	8	GND	POWER
J5	1	Power Supply	DIGITAL OUTPUTS
	2	Digital Output COM	
	3	Digital Output 1	
	4	Digital Output 2	
	5	Digital Output 3	
	6	Digital Output 4	
	7	Digital Output 5	
	8	Digital Output 6	
J6	1	Digital Output 7	RELAYS NO/NC
	2	Digital Output 8	
	3	Relays 2 NO	
	4	Relays 2	
	5	Relays 2 NC	
	6	Relays 1 NO	
	7	Relays 1	
	8	Relays 1 NC	
J7	1	Relays 4 -	RELAYS
	2	Relays 4 +	
	3	Relays 3 -	
	4	Relays 3 +	
	5	Relays 2 -	
	6	Relays 2 +	
	7	Relays 1 -	
	8	Relays 1 +	

## CHAPTER 6: DESCRIPTION OF CONNECTIONS

The Clairitec Programmable Intelligent Display has three different connectors as shown in the photo below:

### CONNECTOR USB


This connector allows you to update firmware and the graphics chart via a computer or a USB key. Thanks to its transfer via USB, the loading time is decreased. It requires a standard adapter USB -> mini USB, available in the starter kit.



Pin	I/O	Description
1	Power	Power Supply +5V / 500mA max
2	I/O	USB -
3	I/O	USB +
4	-	Reserved
5	Power	GND

### CONNECTOR V1 & V2

This connector allows you to connect directly to cameras with a 75Ω impedance male connector. It is recommended to be plugged with the MCX 75Ω impedance female connector, like the [R213182007](#) Radiall component reference or the [73415-4490](#) Molex component reference.




Connector	I/O	Description
1	Video 1	Signal PAL or NTSC
2	Video 2	Signal PAL or NTSC

### CONNECTOR FROM J1 TO J7

Connection Interface for peripheral module.

Connection Interface for serial communication EIA / RS232E or CAN2.0B between the Clairitec HMI board and your application board.

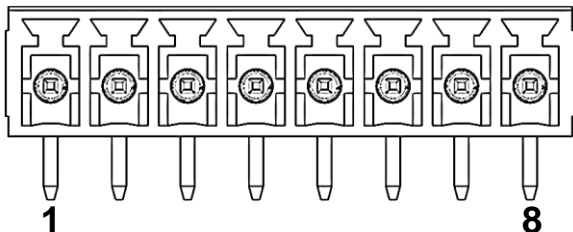

- Update the firmware with the RS232 SpiderGraph protocol,
- Update your graphic chart with the RS232 SpiderGraph protocol,
- Send and receive commands with the RS232 or Can2.0B SpiderGraph protocol


There are many different crosslinks models for this Plug and play connector:

- Wurth [691361300008](#)
- Wurth [691368300008B](#)
- Wurth [691366310008](#)
- Wurth [691363310008](#)

The total number of this connector type is 7 for the existing functionality. It is necessary to add a connector if your system contains I / O specific to your system.


## CHAPTER 7: EMBEDDED MAIN BOARD – MASTER MODE MODEL

For the Master mode, our system has to embed a board which is programed like a state machine. In fact, this board can integrate other specific I/O pinouts: protocol communication, and electronic system. Clairitec can add it on his main board or you can choose your own processor and schematic circuit. The following figures present the maximal and minimal dimension of this board. You can find this board dimension on the STEP file attached.

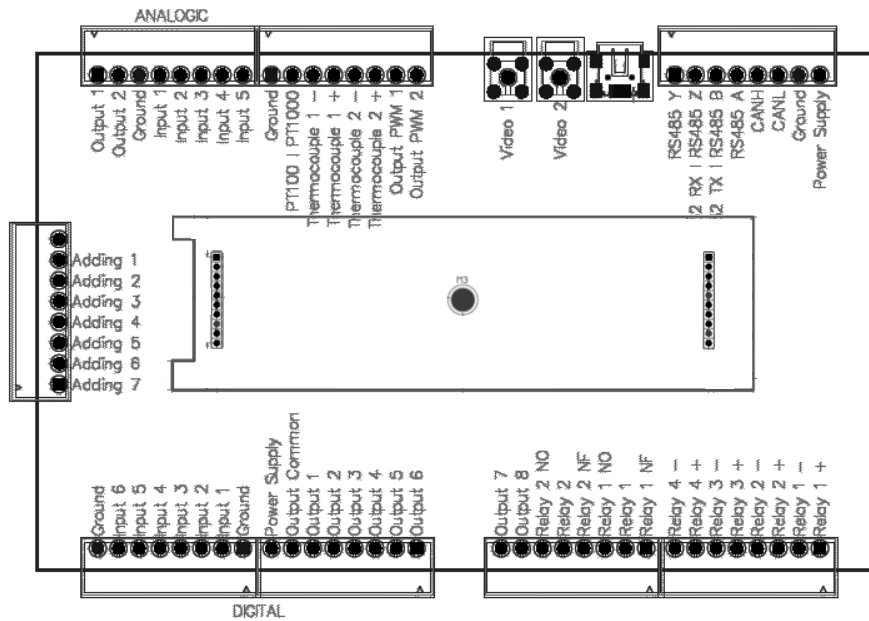


As you see in this figures, you embedded your board thanks to two connectors on our HMI board. Just plug on it.

**MECHANICAL CONSTRAINTS**

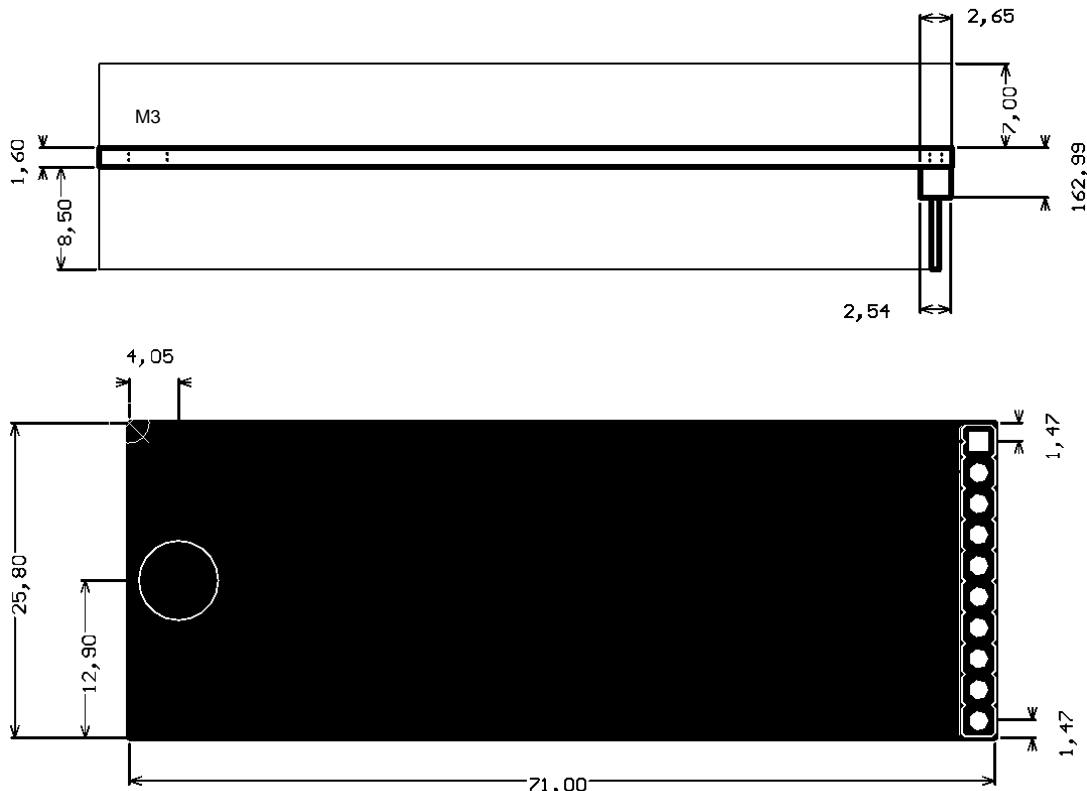

Unit : mm


The embedded main board can't be smaller than the figure above. Otherwise, the PCB will not be screwed. On the other hand, components on the top board can't be higher than 7mm. On the bottom face, the maximal width is 8,50mm. Beware of the connector and the screw hole.

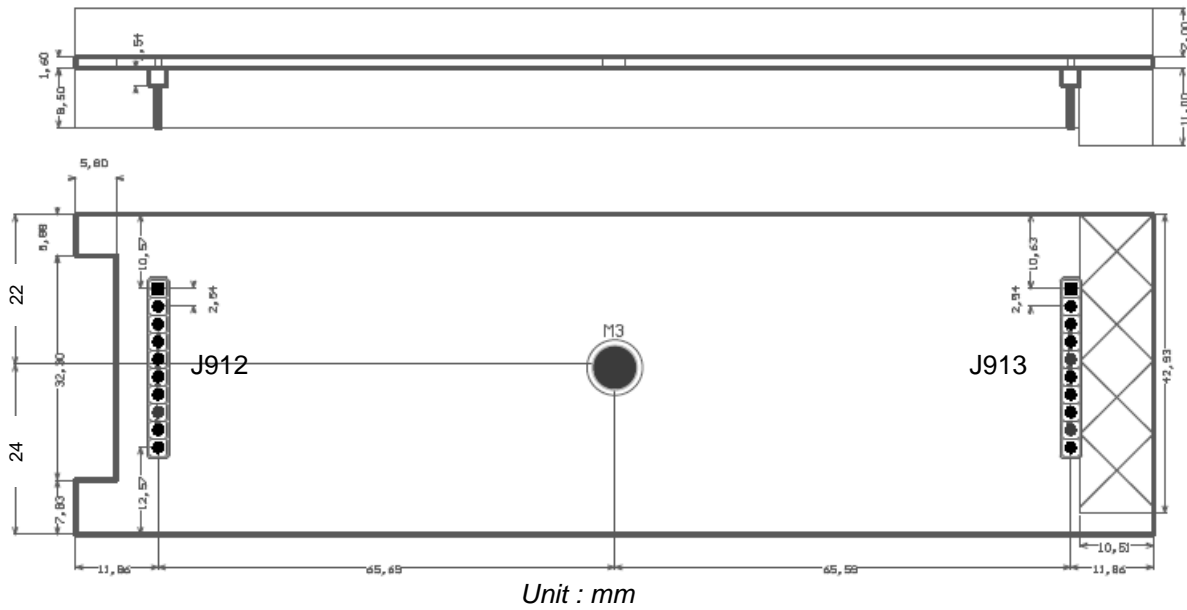

The embedded main board can't be bigger than the figure above. This is the absolute maximum size to fit in our case. Beware as well of the connector and the screw hole, just like the smaller PCB and the component width too. Only on the bottom right face can the component be bigger. Our case accepts a main board specific connector up to 11mm of size (hatched area).

### ELECTRICAL CHARACTERISTICS




The mechanical constraints show you that there is 2 connectors Male Barrel 1x10 with a 2,54mm step. This connectors allow to be connected with our main board.

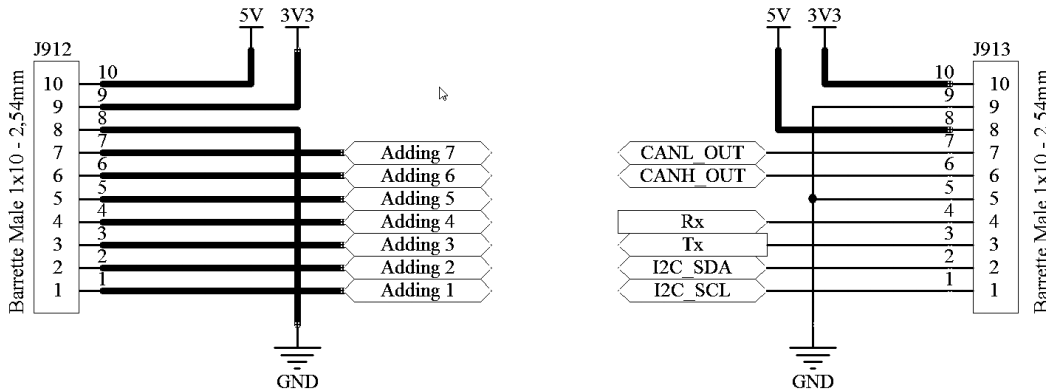

	Item	Symbol	Min	Typ	Max	Unit
5V	Power Supply voltage	V <sub>cc</sub>	-	5	-	V
	Power Supply consumption	I <sub>cc</sub>	0	-	500	mA
3V3	Power Supply voltage	V <sub>cc</sub>	-	3.3	-	V
	Power Supply consumption	I <sub>cc</sub>	0	-	300	mA
RS232 TTL *	Bauderate	Bds	9,6	-	355	Kbds
CAN 2.0B *	Bauderate	Bds	100	-	500	Kbds
I2C	Address Used - TBC	Addr	58 59 55 38			Hex
	Frequency - TBC	f	-	391	-	kHz
Adding	Intensity per Output	I <sub>out</sub>	0	-	3	A

\* PROGRAMMABLE INTELLIGENT DISPLAY COMMANDS O

# CHAPTER 8: MECHANICAL DESCRIPTION

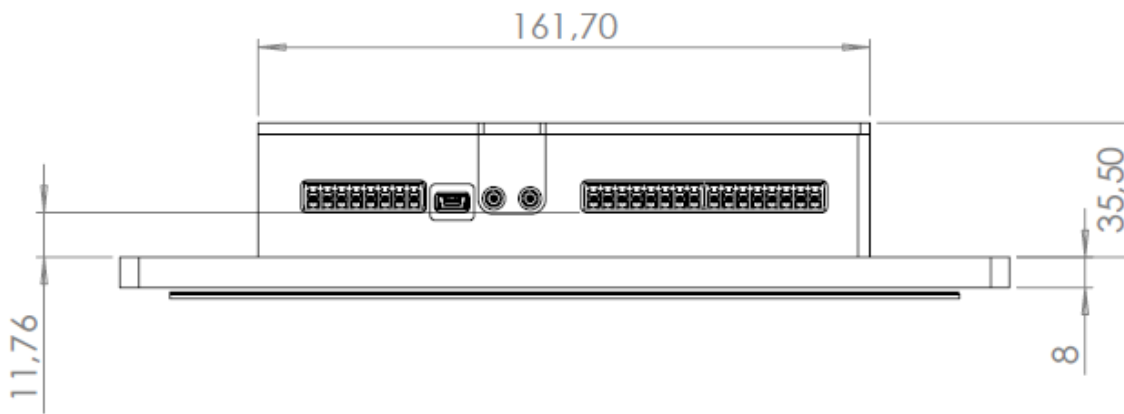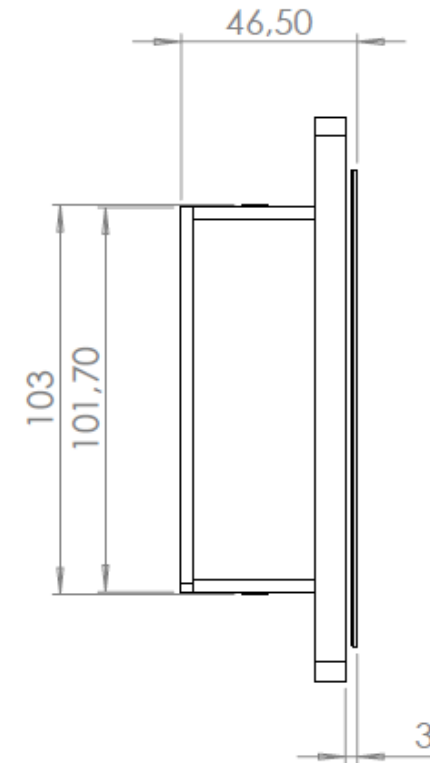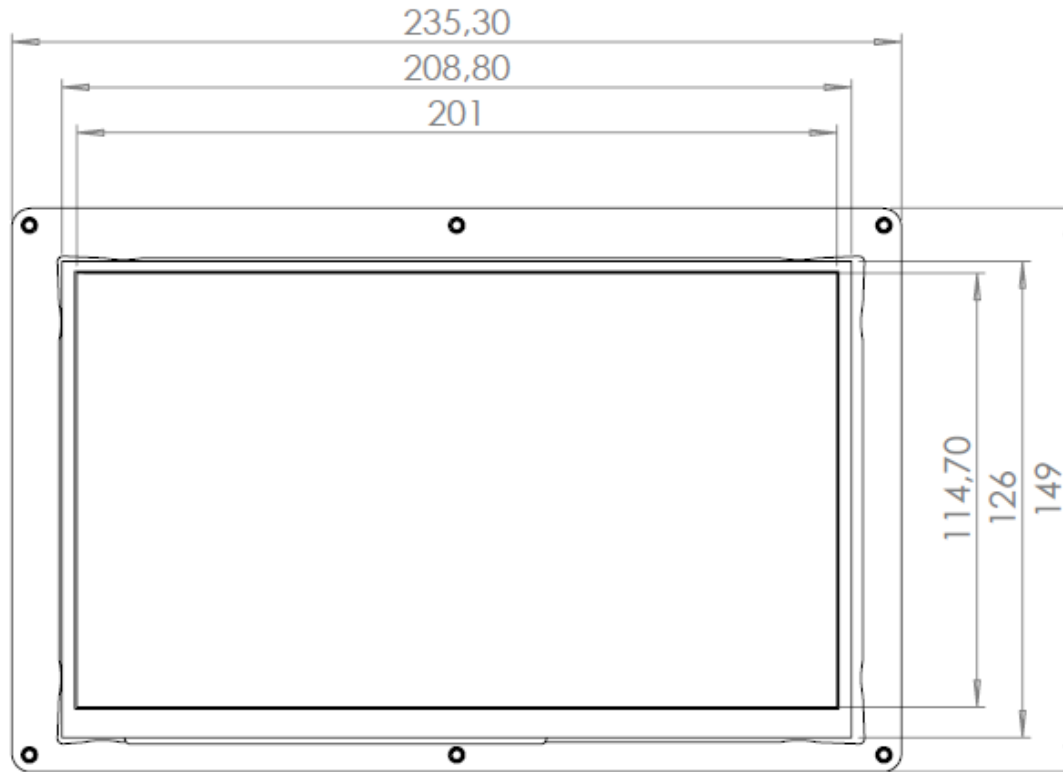

Title :		AIP CASE	
From the behind		A4	
No.		V1.0 rev A	
SCALE:1:2		SHEET 1/ 1	

6 5 4 3 2 1

D

C

B

A

D

C

B

A

6

5

4

3

2

1

6





5

4

3



2

1

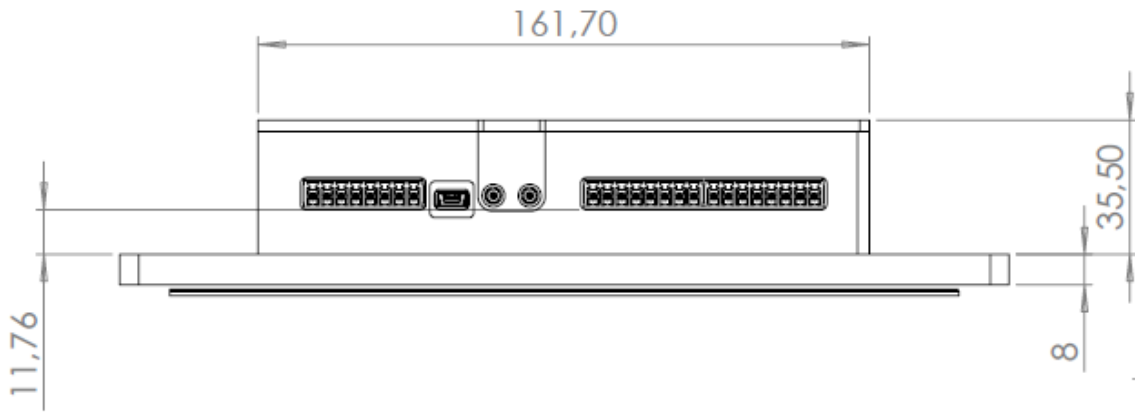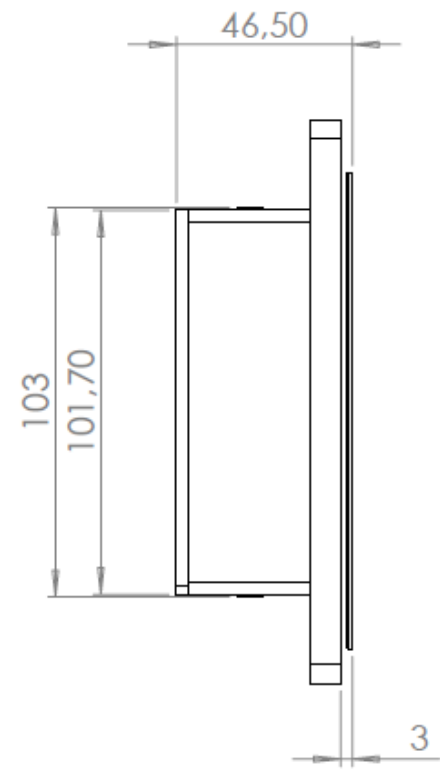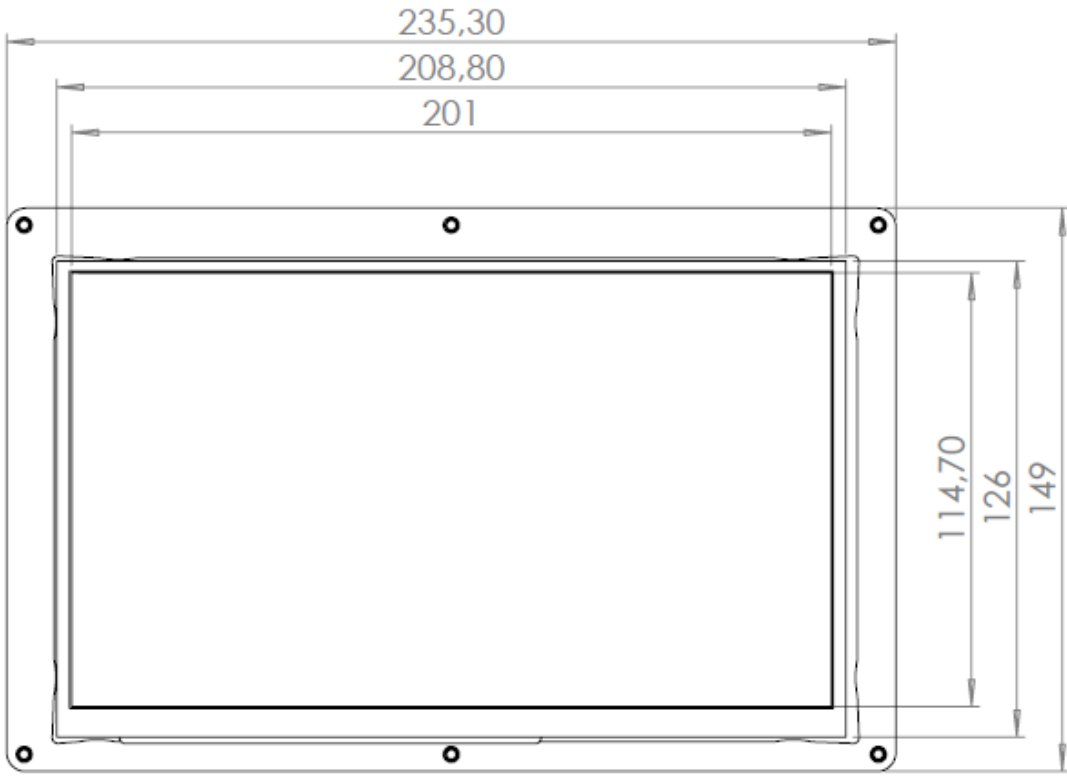

Title :		AIP CASE	
		From the behind	
No.		V1.0 rev A	
SCALE:1:2		SHEET 1/1	
		A4	

# CHAPTER 9: MOUNTING RECOMMENDATION

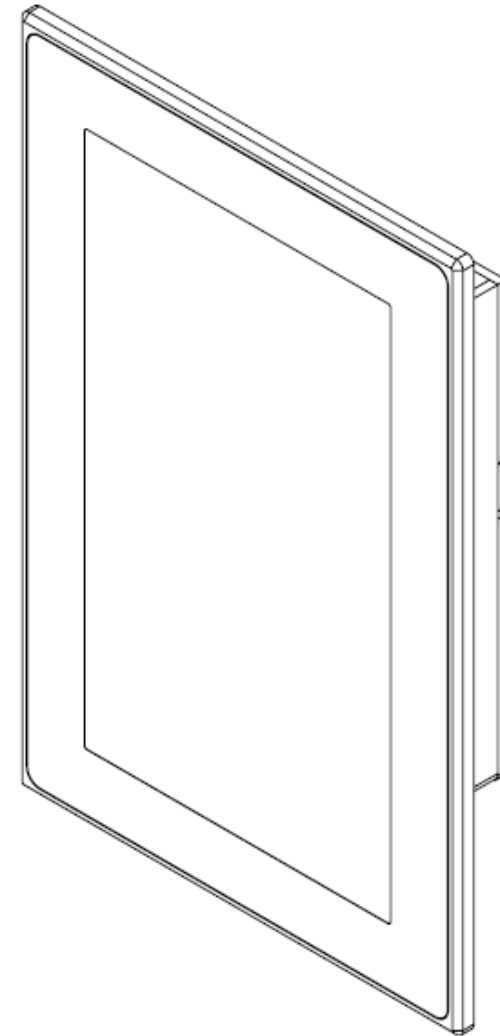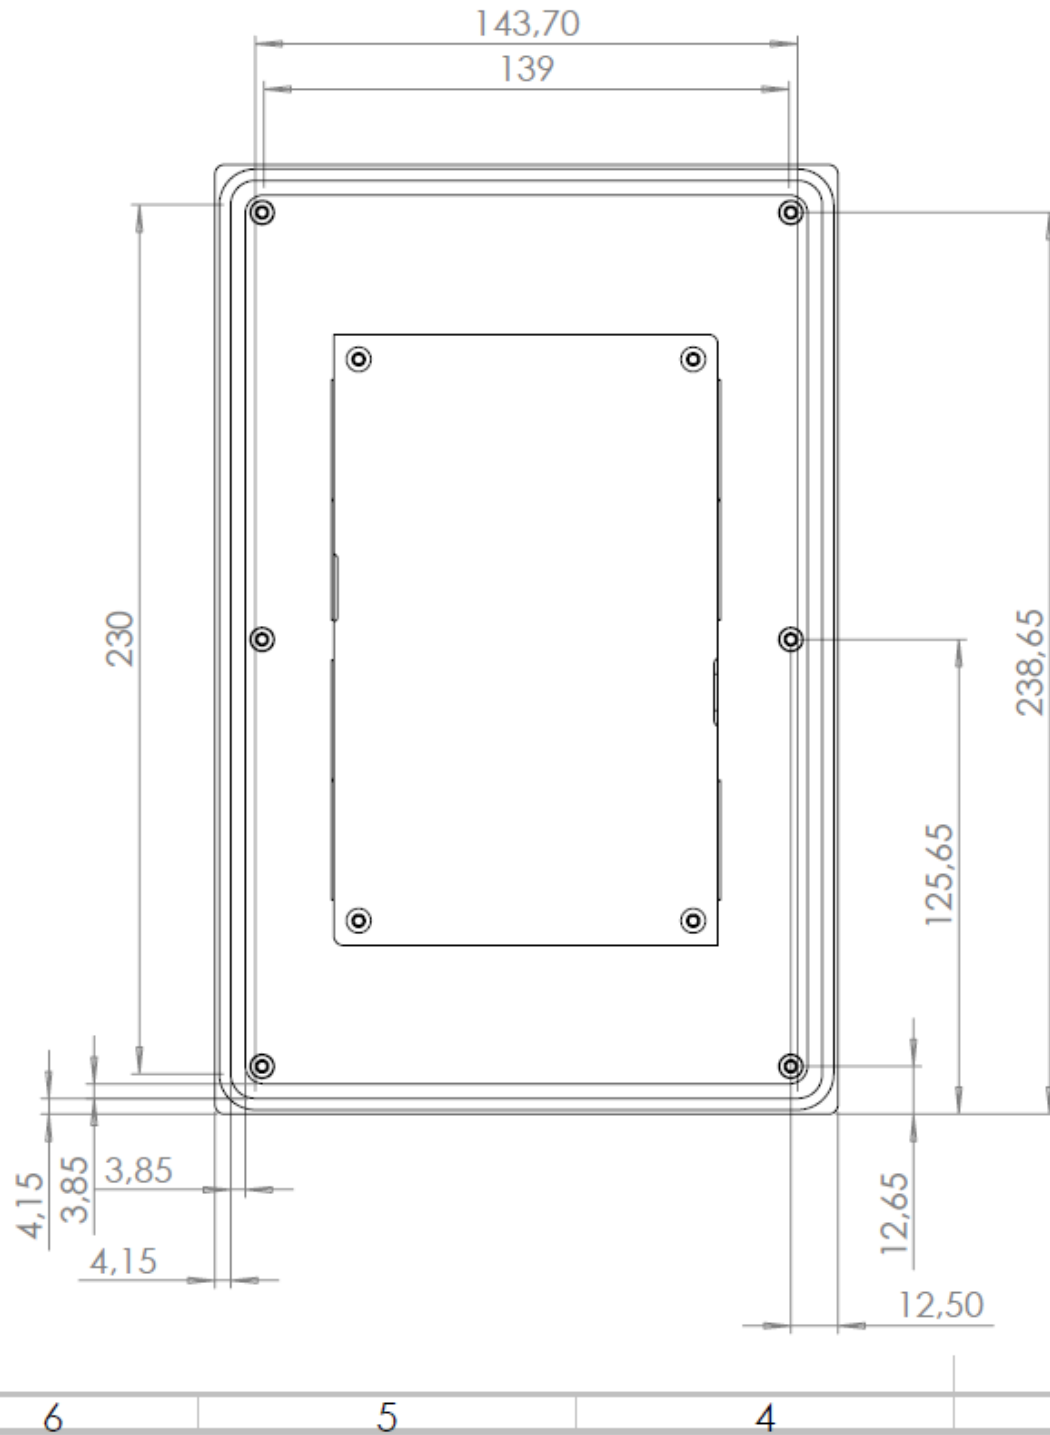

Title :		AIP CASE	
From the behind		A4	
No.	V1.0 rev A		A4
SCALE:1:2	SHEET 1 / 1		

D

C

B

A

6

5

4

3

2


1

D

C

B

A

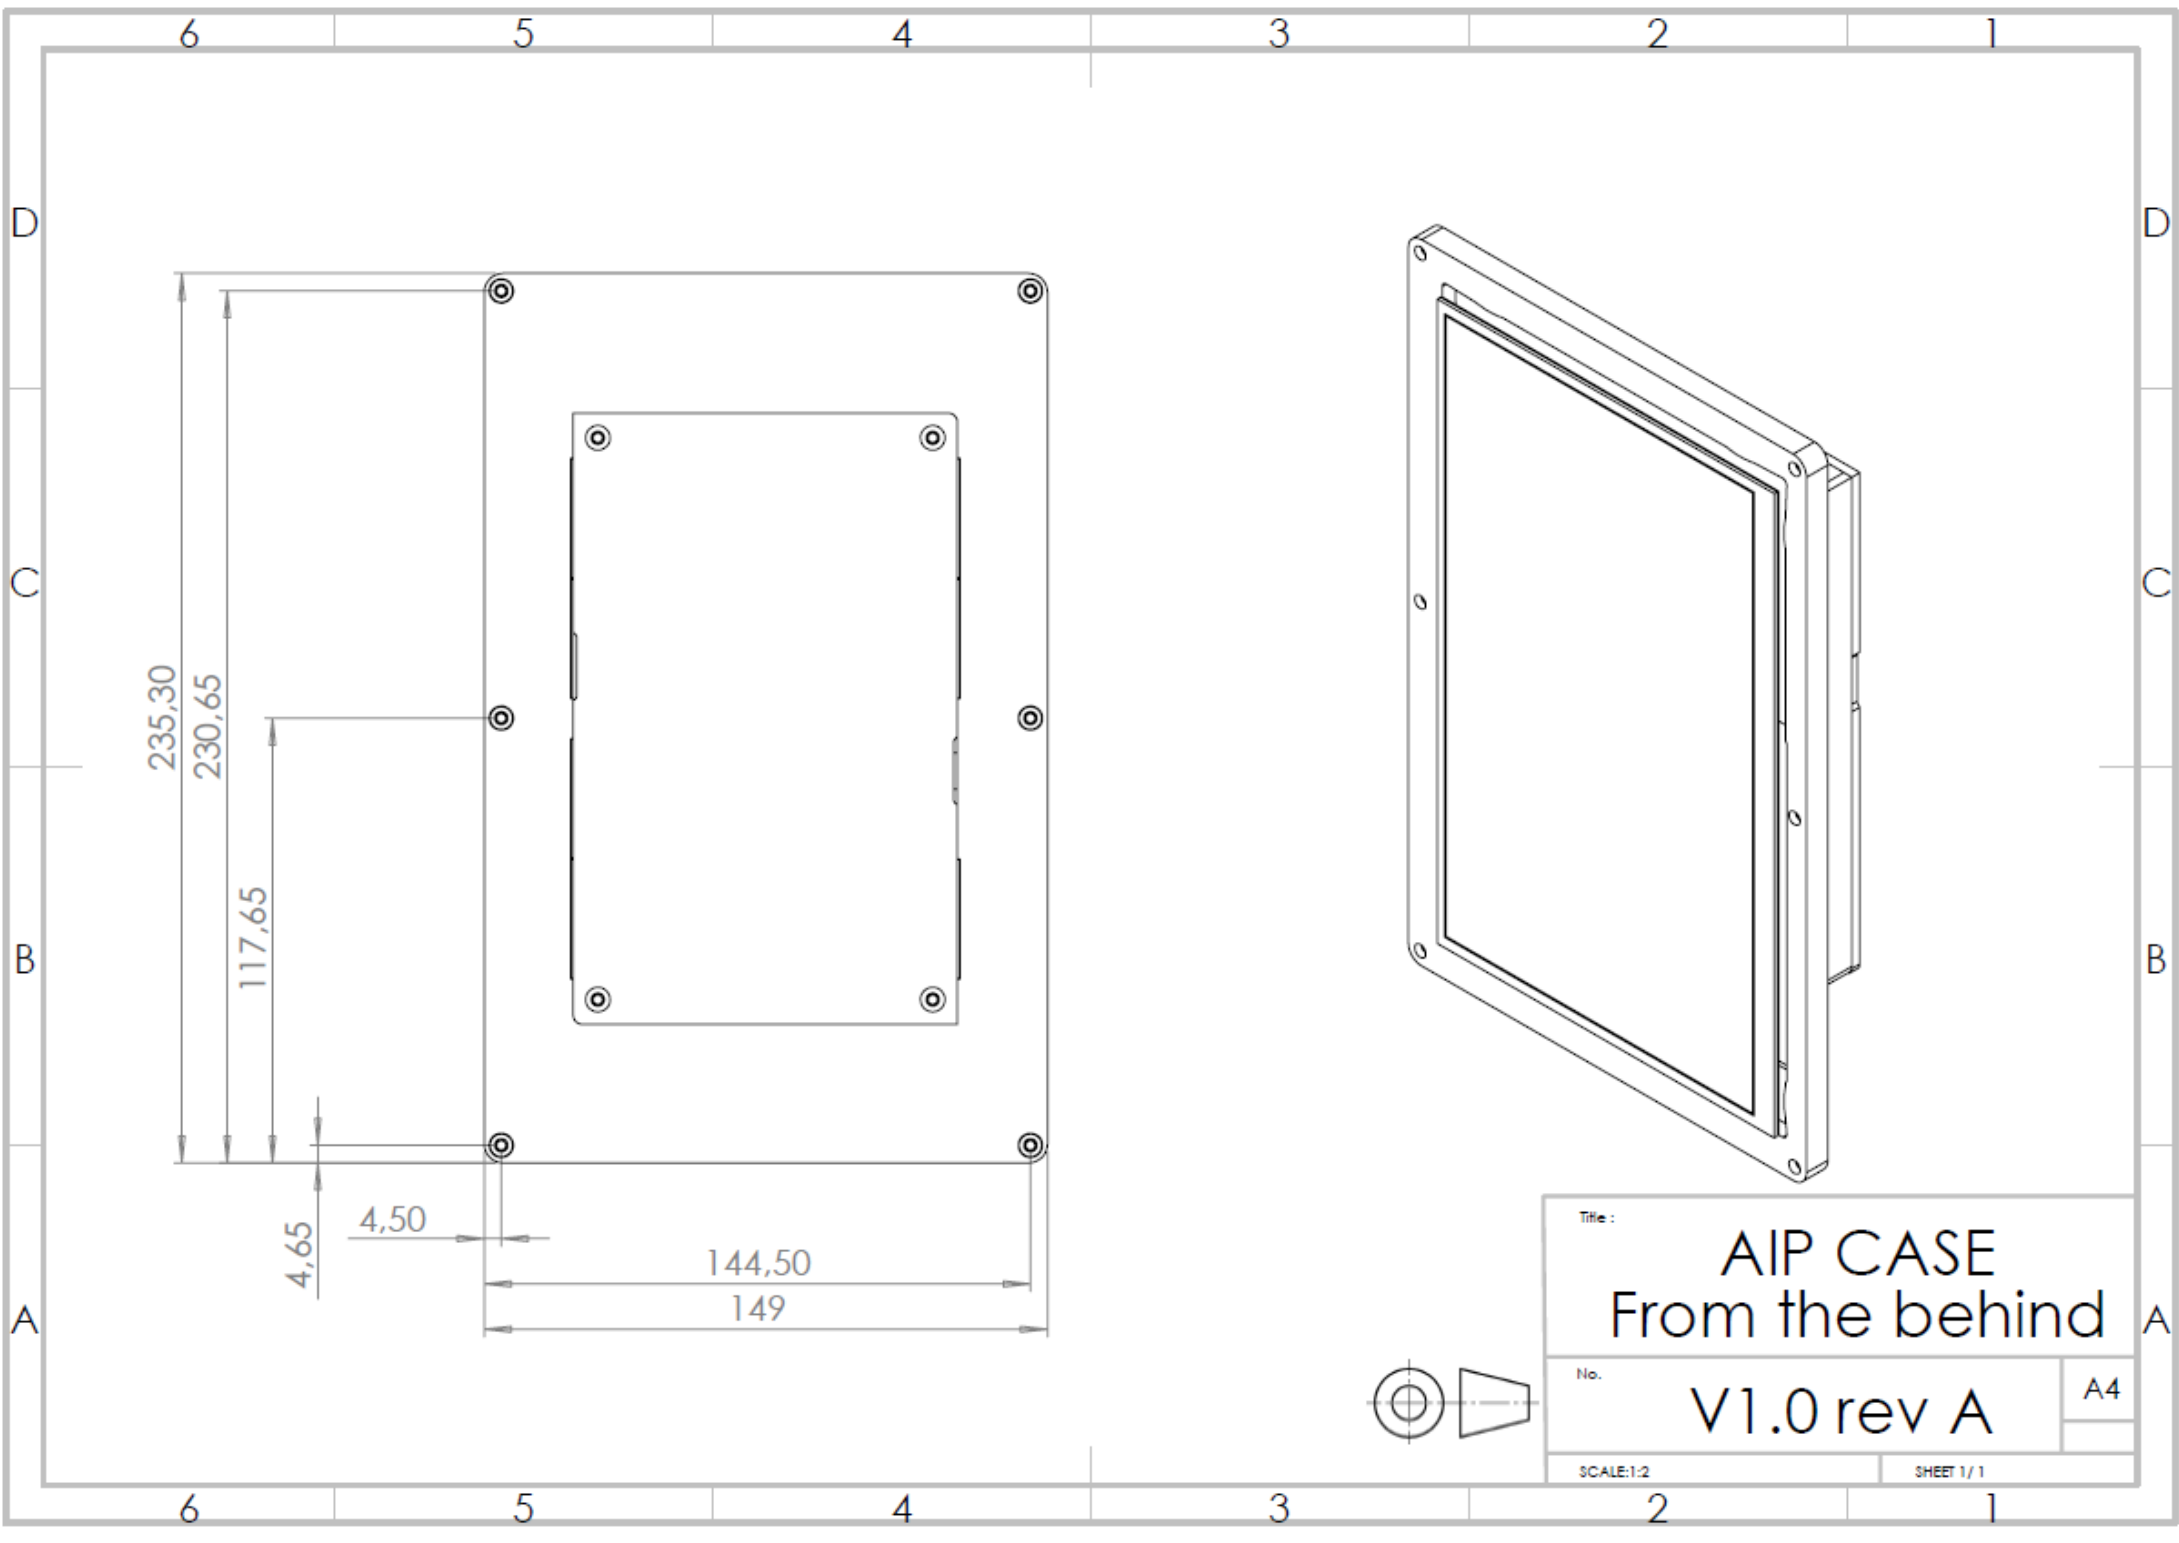

Title :  
**AIP CASE**  
**From the behind**

No. **V1.0 rev A**

SCALE:1:2

SHEET 1/1

A4





## CHAPTER 10: CLAIRITEC'S CONTACT

### Clairitec

CLAIRITEC  
11 avenue Henri Becquerel  
33700 Mérignac  
FRANCE

Web site: [www.clairitec.com](http://www.clairitec.com)

### Clairitec's services

Customer relation service: [contact@clairitec.com](mailto:contact@clairitec.com)

Technical support service: [support@clairitec.com](mailto:support@clairitec.com)



11, avenue Henri Bequerel - 33700 - MERIGNAC - FRANCE

Email: [contact@clairitec.com](mailto:contact@clairitec.com)  
[www.clairitec.com](http://www.clairitec.com)

