


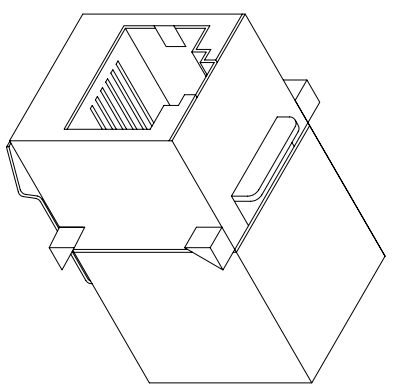
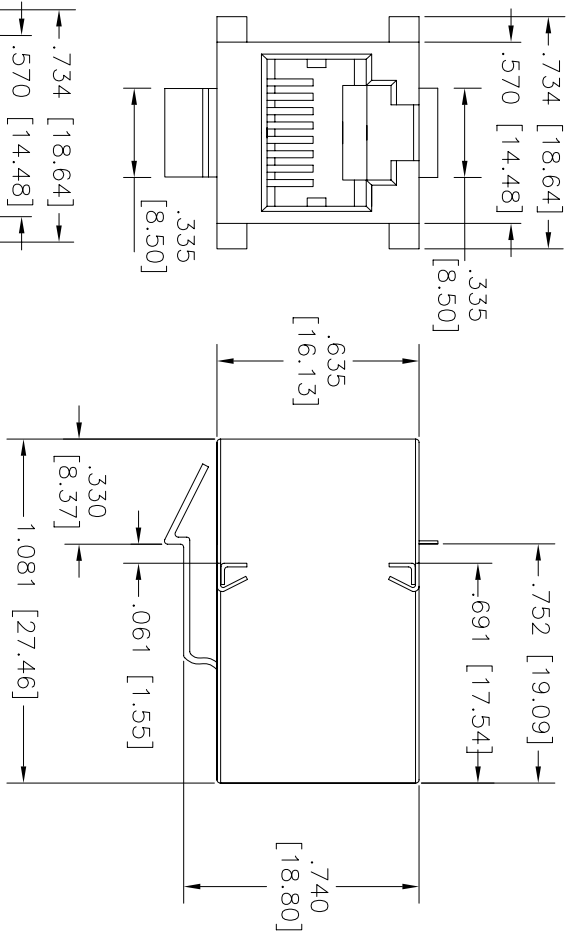


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	11/14/06	KL	
B	added Tol.; plating changed PER ECO 002	01/09/13	KL	

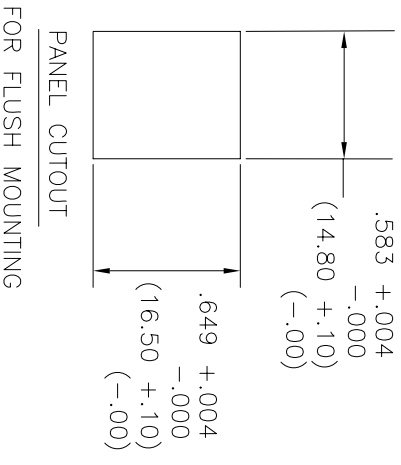

8P6C	TYPE 1
8C	TYPE 2
8Ck	TYPE 3
ITEM	VERSION

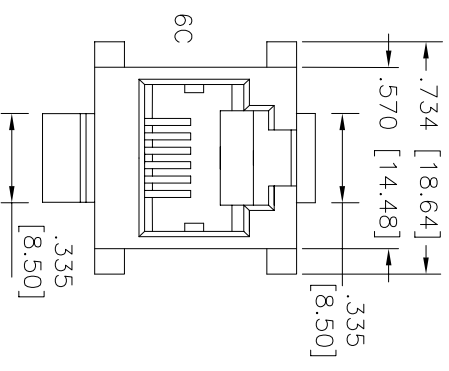

M1026K - (Contacts)
 Contacts: 8C = 8C8P

TOLERANCE unit: mm
 .XX ±0.25
 .XXX ±0.10

UNIT: inch (mm)

CONFIDENTIAL



© Copyright 2006 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: Kilm	DATE: 11/14/06
CHECKED:	DATE:
ENGINEER:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:

TITLE: Modular In-Line Coupler (Shielded)	SIZE: B	DRAWING NO: M1026KS-8C-MMR	REV: B
SCALE: NONE			
SHEET: 1	OF: 1		

ELECTRICAL
 CURRENT RATING: 1.5 AMPS
 CONTACT RESISTANCE: 20 MILLIOHMS

MECHANICAL
 HOUSINGS: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94-V0 RATED, PBT
 SPRING WIRE: SQUARE SPRING WIRE, TEMPERED PHOSPHOROUS BRONZE
 PLATING: 15 MICRO-INCHES OF GOLD OVER NICKEL
 INSERTION/EXTRACTION LIFE: 1000 CYCLES
 SHIELDED: STAINLESS STEEL

M1026KS-8C-MMR