








- Storage Temperature : -40°C to +125°C
- Operating Temperature : -40°C to +85°C
- Small Size and Cost Effective

Electrical Parameters @ 25°C

Primary OCL ($\mu\text{H} \pm 10\%$)	Leakage Inductance (μH Typ.)	Interwinding Capacitance (pF Typ.)	Turns Ratio	DCR (Typ.)			IR (Vdc)	Dielectric Rating (Vrms)
				Pri.	Aux.	Sec.		
@ 100 KHz, 1.0 Vrms	@ 100 KHz, 1.0 Vrms	@ 100 KHz, 1.0 Vrms		Pri.	Aux.	Sec.	2M Ω Min.	60 sec.
26	0.30	50	1 : 0.44 : 0.50	0.065	0.500	0.014	500	1500
Pins 3-5	Pins 3-5 with all other wdg's shorted	Bet Pins 3-5 & all others wdg's	Pri : Sec. : Aux	Pins 3-5	Pins 1-2	Pins 6/7-9/10	Wdg. - Wdg.	Wdg. - Wdg. Wdgs. - Core

Package

Schematic

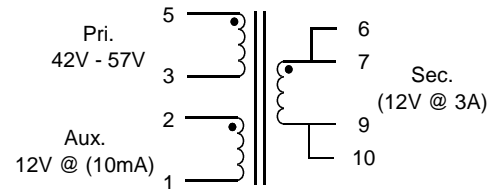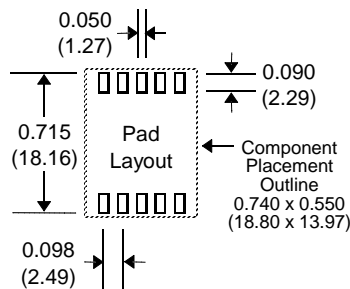

Notes :	EPC3634AG-LF
1. Lead Finish	Hot Dipped Sn or SnCu
2. Peak Solder Rating	245°C
3. Weight	TBD
4. Packaging Information	Tape & Reel : 200 pcs / 13" reel

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$