


○	SPECIFICATIONS 仕様図	SURFACE TREATMENT 表面処理	SYM	DATE	REVISION	REVR	APPR
	HEAT TREATMENT 熱処理	FINISH 仕上げ	1 ^x				
	REFERENCE 参考図		2 ^x				
			3 ^x				

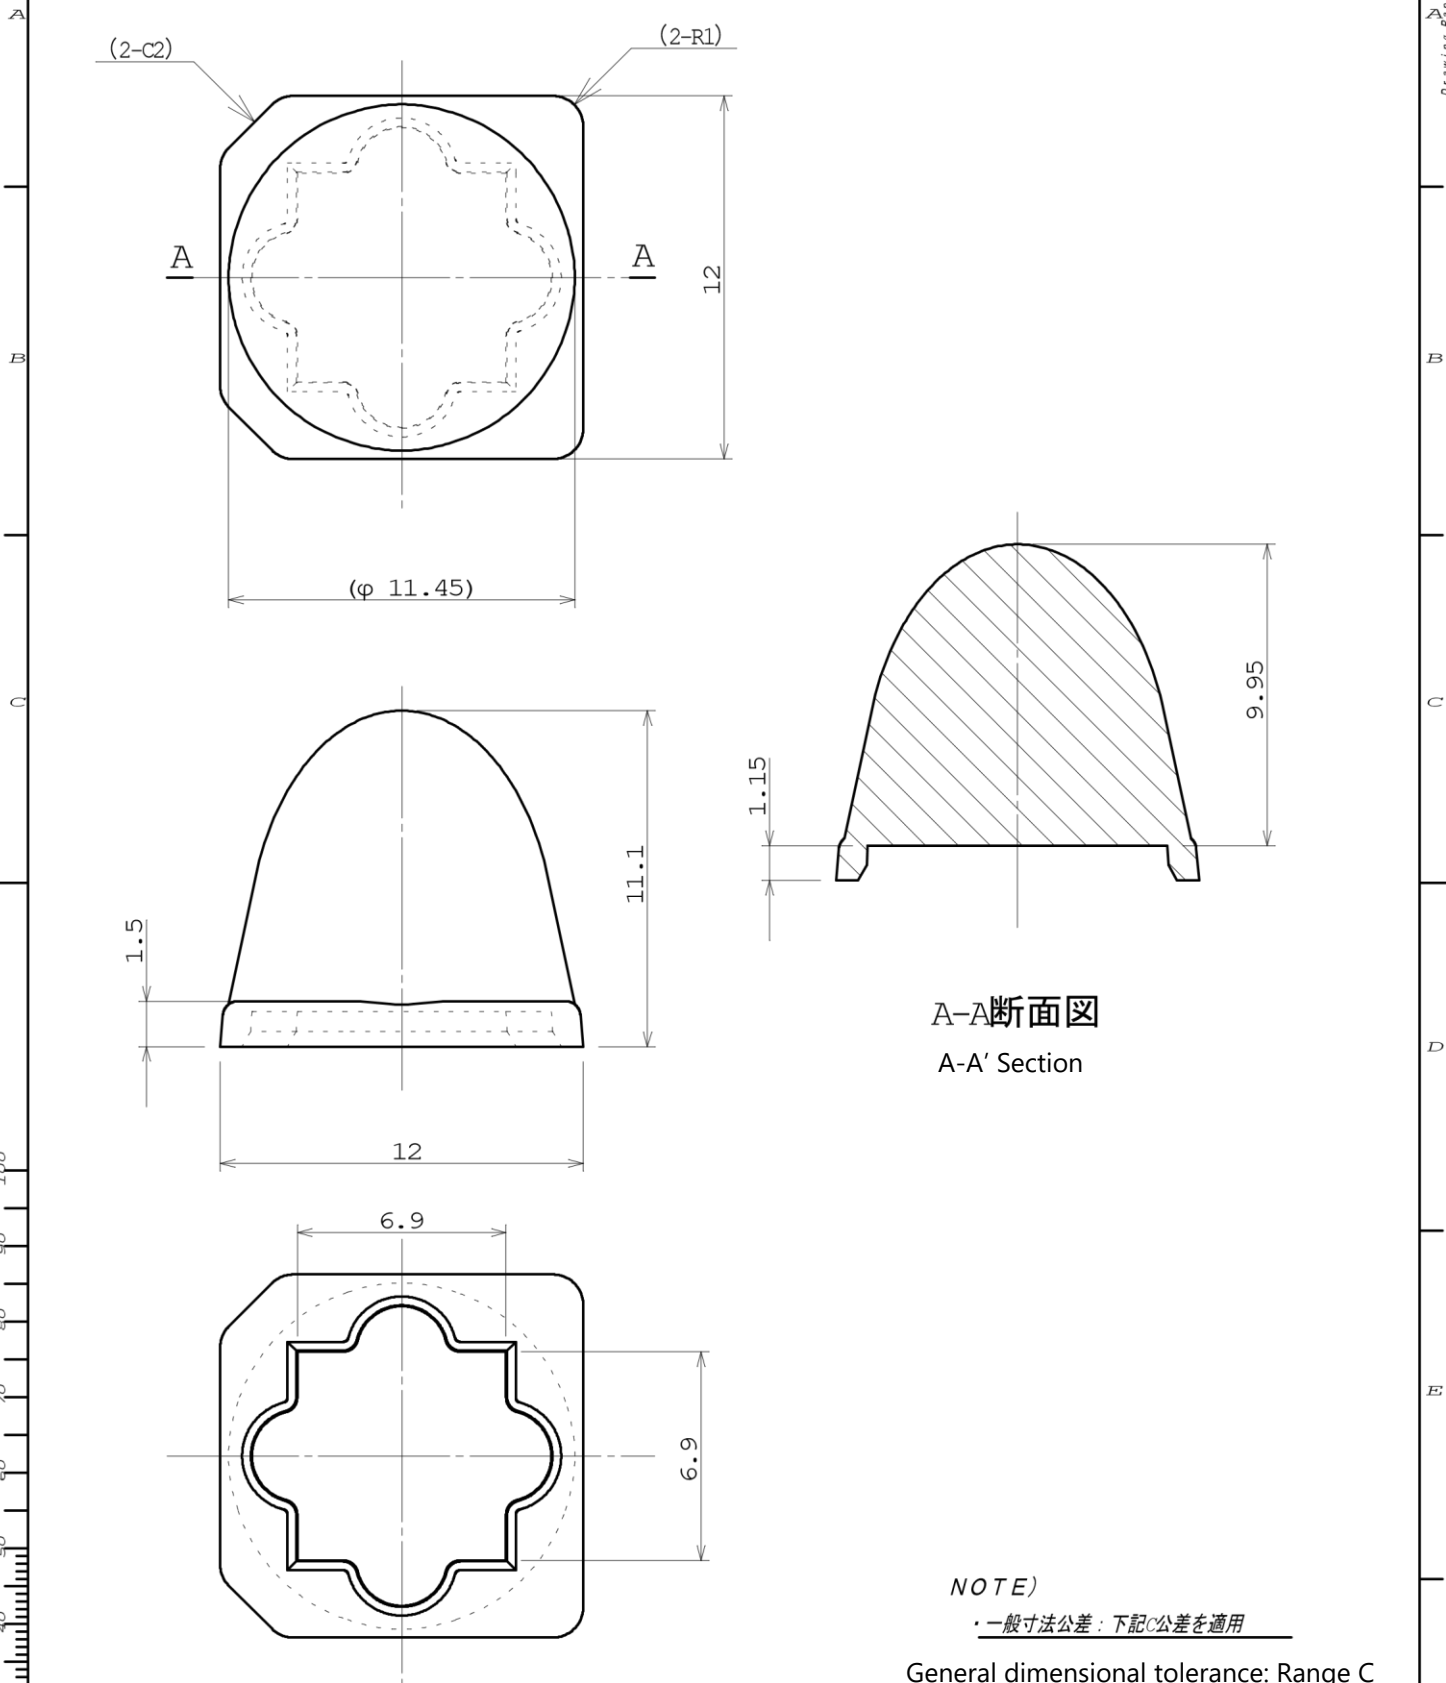

A-A断面図
A-A' Section

NOTE)
・一般寸法公差：下記C公差を適用

General dimensional tolerance: Range C



TOLERANCE UNLESS SPECIFIED			ORIGINAL DATE 2021/7/7	MATERIAL (COMPOUND) Silicone rubber	TITLE DK-8M-033 製品図			
RANGE	A	B	SCALE 4:1	UNIT mm	COLOR Clear	DRAWING NO. 21070703E		
LESS THAN 6	±0.2	±0.1	SIZE A4	3RD ANGLE SYSTEM	HARDNESS A80	DESIGN T.Motoyanagi	DRAWN T.Motoyanagi	CHECKED S.Endo
OVER 6 TO 20	±0.3	±0.2	ASAHIRUBBER INC. 株式会社朝日ラバー		APPROVED E.Ishiguro			
OVER 20 TO 50	±0.5	±0.3						
OVER 50 TO 100	±1.0	±0.5						
OVER 100 TO 300	±2.0	±1.0						
OVER 300 TO 500	±5.0	±2.5						
ANGLE	±2°							

◆ASA COLOR LENS

Part number : DK-8M-033 / DK-30M-033K3

Initial Properties

1. Physical Properties

Items	Materials : ASR-A80MC
Color	Transparent
Hardness JIS Type A	A80/S±5
Total light transmittance(t=2mm)	90% and more
Refractive index (25°C) (D-line 589 nm)	1.41±0.03

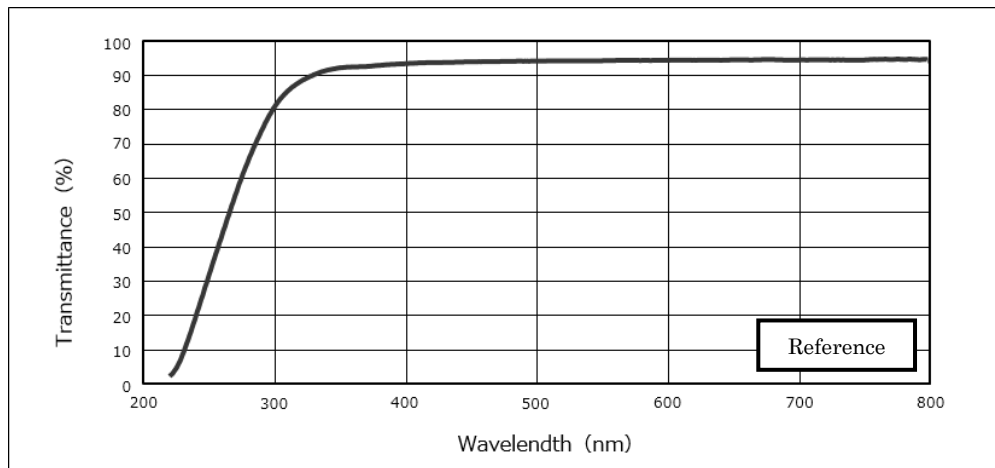


Figure1. Total light transmittance of ASR-A80MC (t=2mm)

2. Light Distribution Data

