

Ordering Guide

Sample Part Number: SKHC1-127-03-T100-SS-T0-F1-AIO

Chip Type	Solder Type	Sealant	Thickness Tolerance	Flatness Tolerance	Ceramic Type	Ceramic Surface
<i>SKHC1-127-03</i>						
SKHC1-127-03 127 couples, 3A max	T100 BiSn (up to 138C)	NS No Sealant	T0 ±0.1 mm	F0 ±0.05 mm	AIO Alumina (96% white)	- None
	T200 CuSn (up to 227C)	SS Silicone sealant	T1 ±0.05 mm	F1 ±0.025 mm	AlN Aluminum Nitride	M Metalized
		ES Epoxy Sealant	T2 ±0.025 mm	F2 ±0.0125 mm		
		CS Customer specified sealant				


Performance Metrics

Cat Logic	Hot Side Temp T_h (°C)	ΔT_{max} (°C)	Q_{max} (Watts)	I_{max} (Amps)	V_{max} (DC Volts)	R_{AC} (Ω)	TE Dimensions (mm)			
							A	B	C	D
SKHC1-127-03	27	74	44.6	4.2	16.8	3.03	40	40	4.2	150
SKHC1-127-03	50	83	49	4.2	18.08	3.26	40	40	4.2	150

Notes:

- All performance values fall within $\pm 10\%$ tolerance of tested data and/or models.
- Dimensions are typical and subject to change based on exact configuration ordered.
- Contact Sheetak at info@sheetak.com for additional performance data, chip options or customization

Chip Dimensions






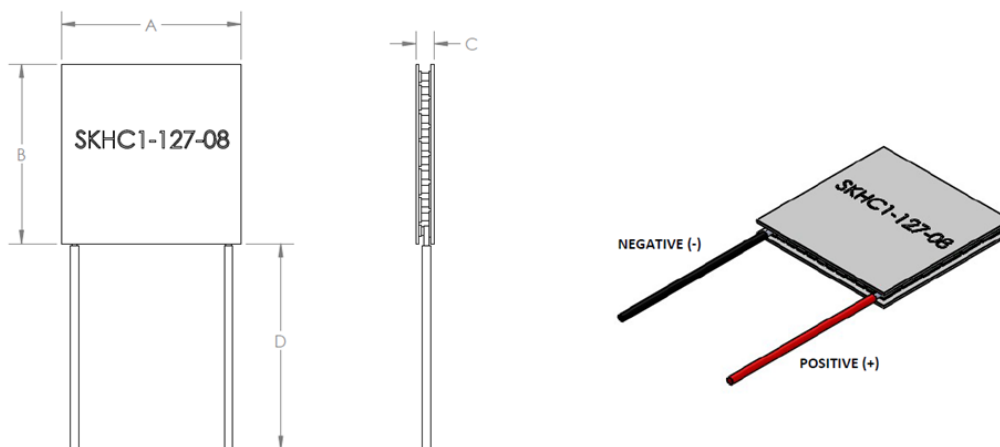


Notes:


- Please see the *Ordering Guide* for flatness and thickness tolerances.
- Ceramic face with part number is the cold side and wires are soldered on the hot side.
- Some TECs may have a porch design or wires soldered on the side.

Performance Curves @ $T_H = 27^\circ\text{C}$

Performance Curves @ $T_H = 50^\circ\text{C}$

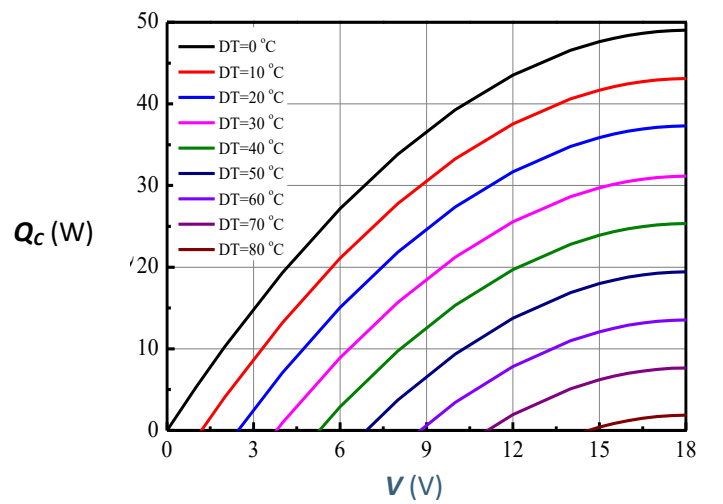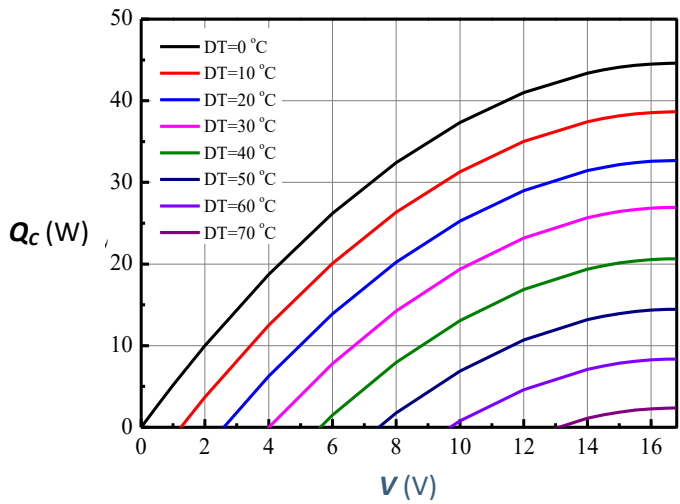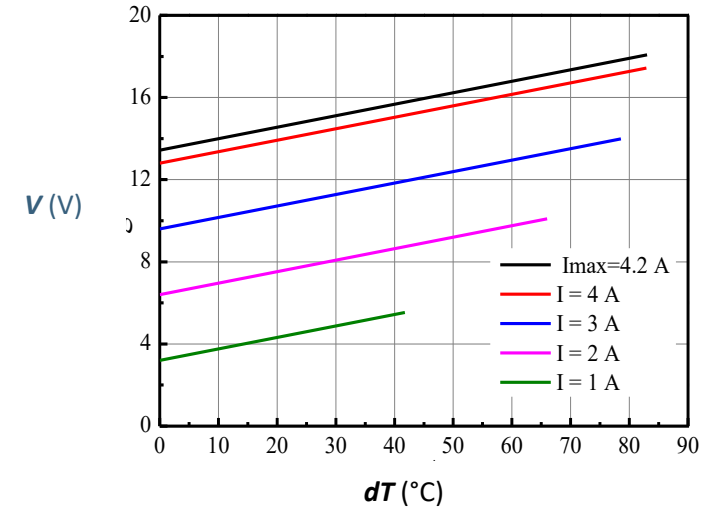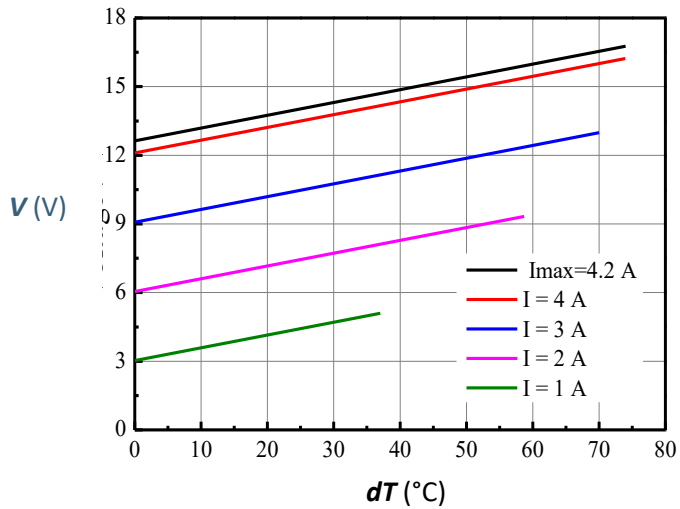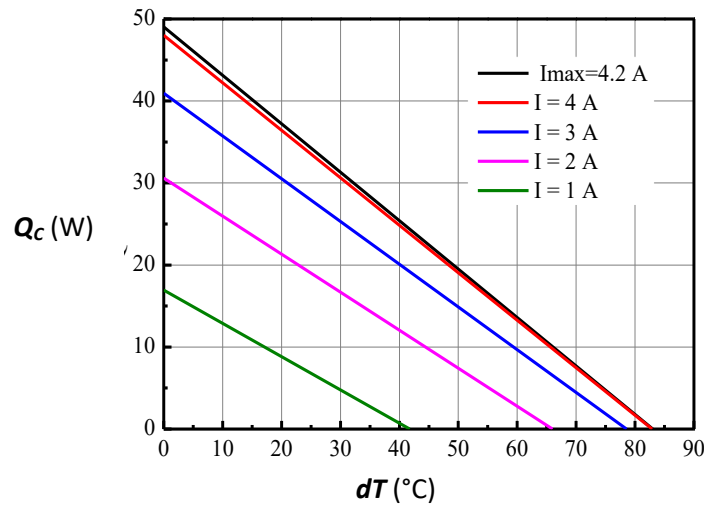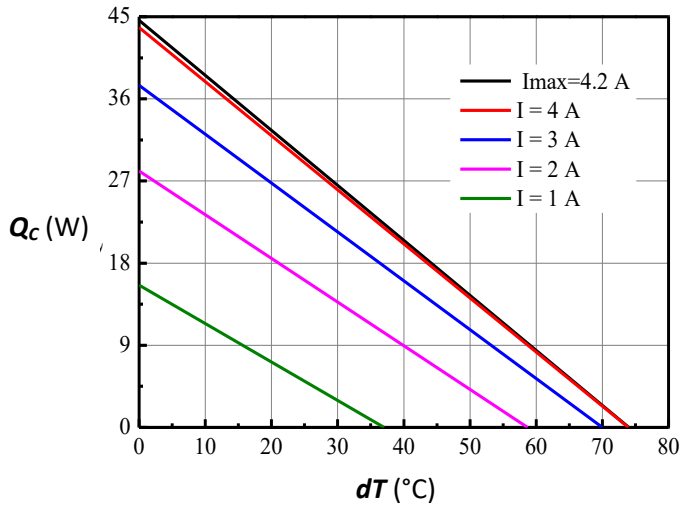

Performance Curves @ $T_H = 27^\circ\text{C}$

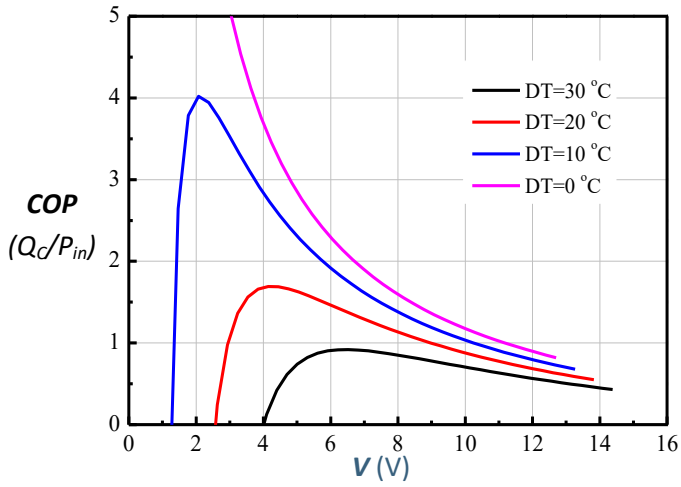

Performance Curves @ $T_H = 50^\circ\text{C}$

